


Stop screws for guide rails



Stop screws

The stop screws are screwed into the thread (option) of the guide rails. An attached rubber cap dampens the stop. For rail lengths with initial hole dimensions below L11 min. we deliver the drilling pattern offset by half a drilling jump.

Material: chlorobutadiene rubber (Cr), color black.

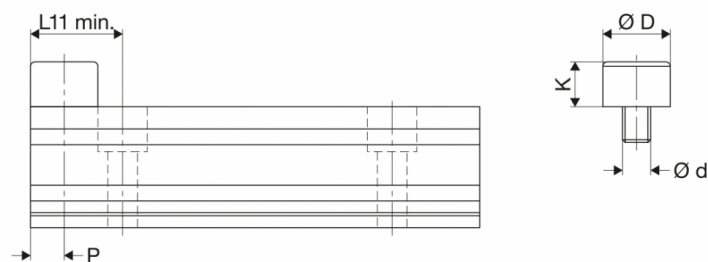

Name	Size	Dimensions mm					Order no.
		d	D	K	L11 min.	P	
FDA12-20M05	12	M 5	12	8	15,0	6,0	63504A
FDA12-20M05	15	M 5	12	8	16,0	6,0	63504A
FDA12-20M05	20	M 5	12	8	17,0	6,0	63504A
FDA25M06	25	M 6	15	10	20,5	7,5	63505A
FDA35M08	35	M 8	19	13	26,5	9,5	63506A
FDA45M10	45	M 10	24	16	33,0	12,0	63507A

Contact

Franke GmbH
 Obere Bahnstraße 64
 73431 Aalen - Germany

Tel. +49 7361 920-0
 Fax +49 7361 920-120
 info@franke-gmbh.de

DIN EN ISO 9001 QM
 DIN EN ISO 14001 QM

Created: 21.02.2025